


TA8768UX Cat.6 Toolless Keystone Jack

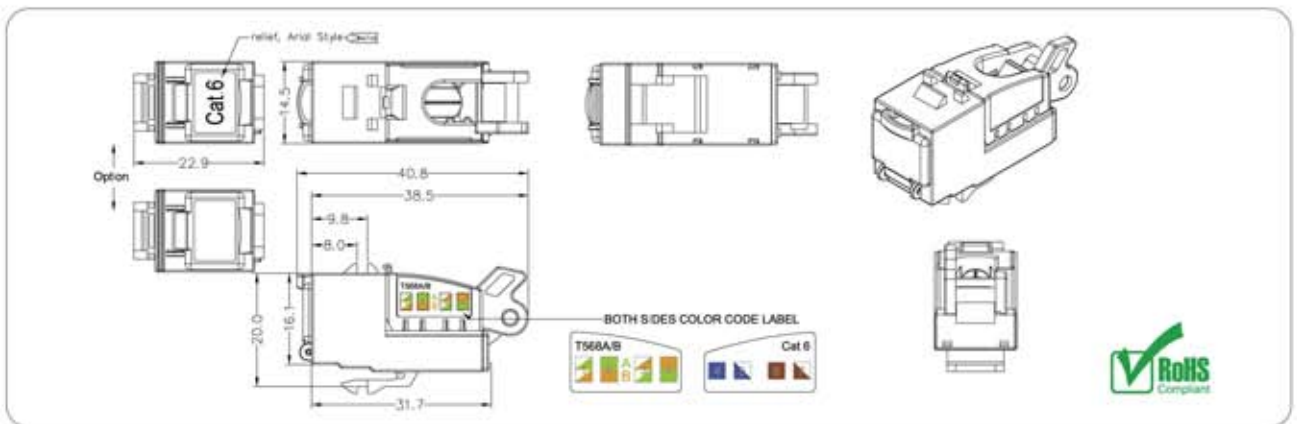

Specification:

Qualified Cat.6
Permanent link/channel of TIA/EIA-568B-B.2.1 Cat.6
ISO/IEC 11801 2nd edition,
EN 50173 2nd edition
IEC60603-7

Electrical:

Current Rating: 1.5 Amps
Insulation Resistance: 500 Mohms Minimum
Contact Resistance: 20 mohms Maximum
DC Resistance: 0.1 ohms Maximum

Mechanical:

Plug Insertion Life: 750 Cycles Minimum
Plug & Jack Contact Force: 100 Grams Minimum
Plug Retention Force: 30 lbs Minimum
Temperature: -40°F to 150°F (-40°C to 68°C)

Physicals:

Housing: PC, UL 94V-0
PCB Module
Insertion: PBT UL 94V-0
Contact: Ø0.46 mm phosphor bronze 30µ" gold over nickel plating
IDC: 0.4 mm phosphor bronze tin plating
IDC holder: PC, 94V-0
PCB: FR4
Cap: PC, UL 94V-0
Shutter: PC, UL 94V-0
Shielded cover: SPTE 0.30mm thickness
Shielded base: SPTE 0.30mm thickness

Patented:

TW : M269631 2005/07/01
US : Patent pending
EU : 000272570-001 2004/12/28



TA8768UT