


CABLE ASSEMBLY, FIBER OPTIC, 09/125μm

G657B3 PIGTAIL, SC/APC

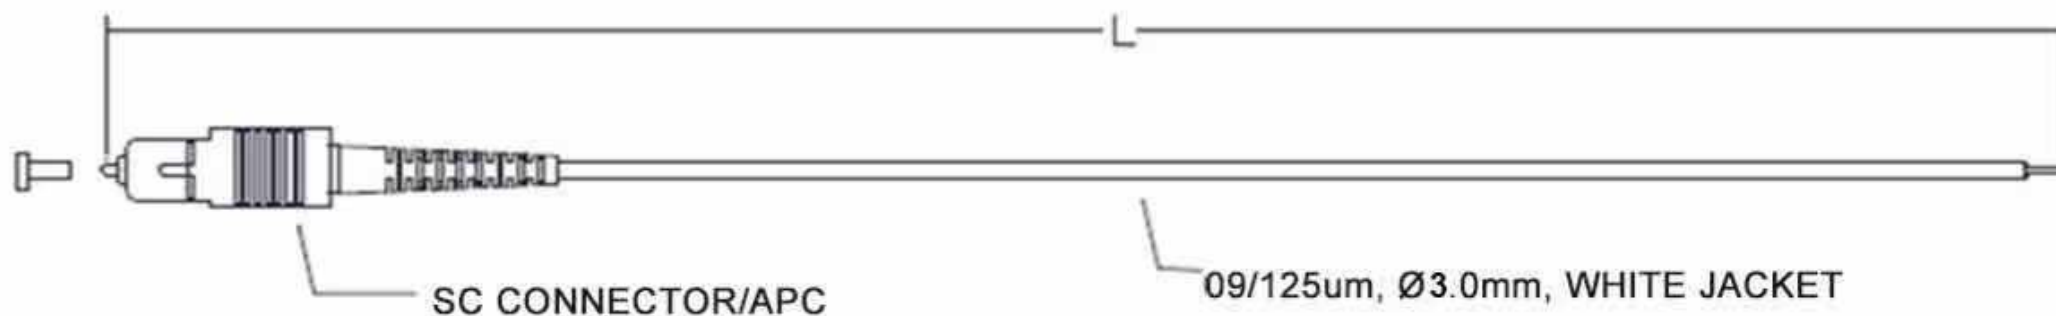

1. All SC connectors in this assembly meet TIA/EIA-604-3;
2. Fiber Optic Cable Performance Properties
 - Comply with TIA/EIA-568 B.3 & Bellcore GR-409-CORE & OFNR-UL/CSA FT-4
 - Maximum Attenuation : $\leq 0.4\text{dB/km}$ @ 1310nm; $\leq 0.25\text{dB/km}$ @ 1550nm
3. SC Specification
 - Durability: 500 matings
 - Operating Temperature: -40°C to $+80^{\circ}\text{C}$
 - Insertion Loss: Typical $< 0.2\text{dB}$, Maximum $< 0.3\text{dB}$
 - Cable Retention: $> 11\text{ lbs. /50 N}$ straight, $> 4\text{ lbs. / 19 N}$ at 90°
 - Color: SC/APC GREEN, Cable WHITE jacked
4. Ordering Information: SCA09Z ① LSZH ② 30 P

① ②
 ① Outer Jacket: P-PVC **L-LSZH** ② Length: in meters **30M**
5. Packing: The corresponding label data for each cable assembly shall be glued to the package.

Item	SCA 1M (09/125) SM PG-B3			
Item No.				
Insertion Loss	1	2	3	4
Return Loss	1	2	3	4
Date	2020.06.10			

	
Product name:	
PIGTAIL SC/APC 09/125um 0.9mm Simplex G657B3	
Part No.: PIG09/125SC/APC-30M-B3	
Approved Date: 15-3-2020	